



CB 246-249

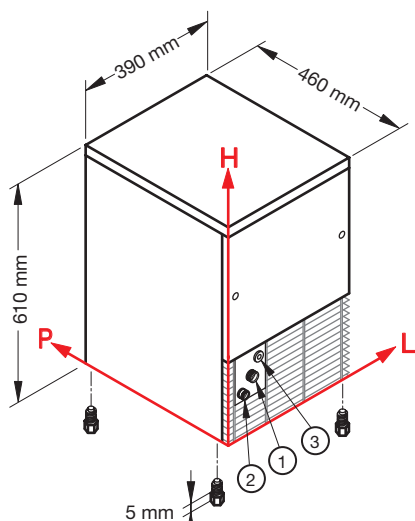

CB 246

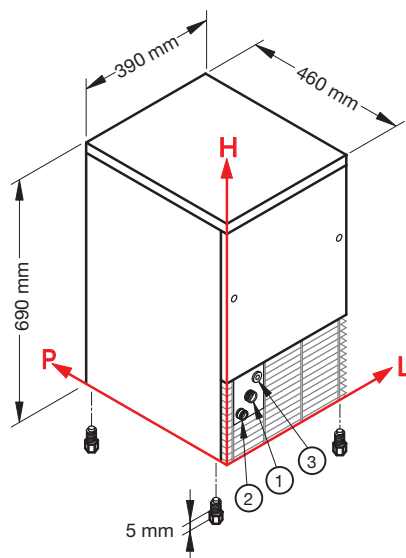

CB 249

CONNECTIONS	CB 246			CB 249		
	L	H	Ø	L	H	Ø
① Water inlet	111	175	3/4"	111	175	3/4"
② Water outlet	49	130	24 mm	49	130	24 mm
③ Electrical connection	156	211	-	156	211	-

TECHNICAL INFORMATION	CB 246	CB 249
Production in 24 h, up to	24 kg	28 kg
Storage capacity	6 kg ≈ 350 □	9 kg ≈ 530 □
Cooling system	A - W	A - W
Cube type	A-18g D-13g C-33g	A-18g D-13g C-33g
Refrigerant	R404A	R404A
Standard voltage	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Electrical consumption	350 W	370 W
Fuse	10 A	10 A
Water consumption (l/kg)	A 5,1 W 14	A 5,1 W 14
Dimensions (W×D×H)	390x460x610 mm	390x460x690 mm
Packed dimensions (W×D×H)	440x520x800 mm	440x520x880 mm
Weight (net/gross)	35/41 kg	37/44 kg

Finish: 18/8 stainless steel, Scotch-Brite

INSTALLATION CONDITIONS	Min / Max
Installation	indoor
Ambient temperature	+10 / +43 °C
Water temperature	+3 / +32 °C
Voltage	± 10%
Water inlet pressure	1bar (14psi) / 6bar (84psi)

CONDITIONS	
Standard cube	18g
Ambient temperature	+21°C
Water temperature	+15°C
Electrical consumption (standard voltage)	400 W

CB 246-249



Automatic ice cube makers — spray system.

Quality cubes: compact, cold and crystal clear. Ice drops into the storage bin, ready to meet demand even at peak times.



CB 246



CB 249

