



GB 902.903

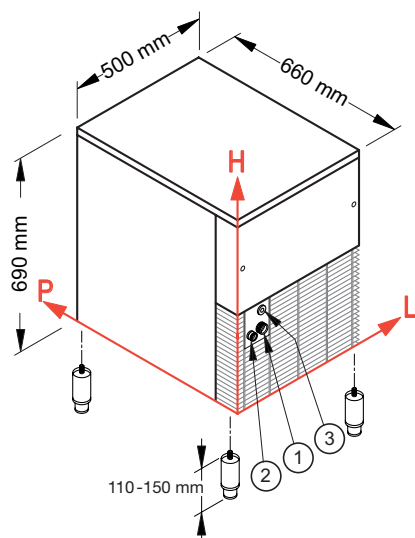

GB 902

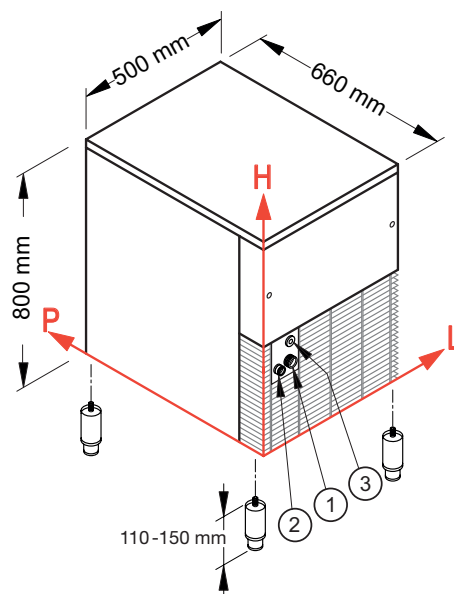

GB 903

CONNECTIONS	GB 902			GB 903		
	L	H	Ø	L	H	Ø
① Water inlet	99	158	3/4"	99	158	3/4"
② Water outlet	48	151	24 mm	48	151	24 mm
③ Electrical connection	87	230	-	87	230	-

TECHNICAL INFORMATION	GB 902	GB 903
Production in 24 h, up to	90 kg	90 kg
Storage capacity	20 kg	30 kg
Cooling system	A - W	A - W
Refrigerant	R404A	R404A
Standard voltage	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Electrical consumption	550 W	550 W
Fuse	10 A	10 A
Water consumption (l/kg)	A 1 W 6,3	A 1 W 6,3
Dimensions (W×D×H)	500x660x690 mm	500x660x800 mm
Packed dimensions (W×D×H)	550x720x880 mm	550x720x990 mm
Weight (net/gross)	59/67 kg	67/76 kg

Finish: 18/8 stainless steel, Scotch-Brite

INSTALLATION CONDITIONS	Min / Max
Installation	indoor
Ambient temperature	+10 / +43 °C
Water temperature	+3 / +32 °C
Voltage	± 10%
Water inlet pressure	1bar (14psi) / 6bar (84psi)

CONDITIONS	
Ambient temperature	+21°C
Water temperature	+15°C
Electrical consumption	403 W (standard voltage)

GB 902.903



Automatic granular ice makers.

Compact granular ice for use in bars, restaurants, fish shops, and the chemical and pharmaceutical industries.



GB 902



GB 903

