



IMF 58-80

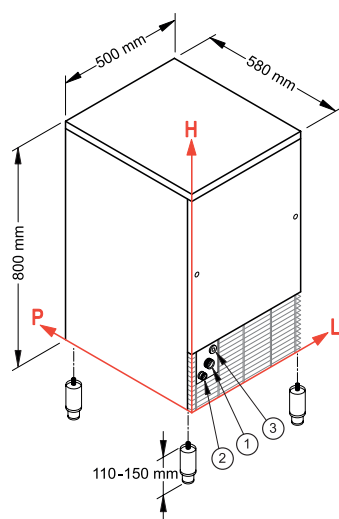

IMF 58

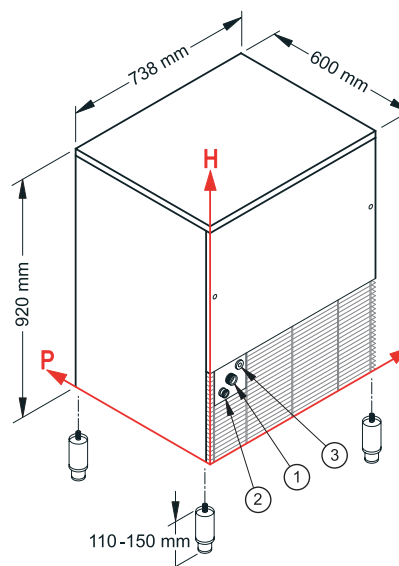

IMF 80

CONNECTIONS	IMF 58			IMF 80		
	L	H	Ø	L	H	Ø
① Water inlet	111	196	3/4"	116	285	3/4"
② Water outlet	49	151	24 mm	54	240	24 mm
③ Electrical connection	156	232	-	161	321	-

TECHNICAL INFORMATION	IMF 58	IMF 80
Production in 24 h, up to	45 kg	75 kg
Storage capacity	20 kg	30 kg
Cooling system	A - W	A - W
Cube type	A-20g	A-20g
Refrigerant	R404A	R404A
Standard voltage	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Electrical consumption	420 W	480 W
Fuse	10 A	10 A
Water consumption (l/kg)	A 3,3 W 10,5	A 3,3 W 10,5
Dimensions (W×D×H)	500x580x800 mm	738x600x920 mm
Packed dimensions (W×D×H)	550x630x990 mm	780x640x1085 mm
Weight (net/gross)	54/62 kg	75/87 kg

Finish: 18/8 stainless steel, Scotch-Brite

INSTALLATION CONDITIONS	Min / Max
Installation	indoor
Ambient temperature	+10 / +43 °C
Water temperature	+3 / +32 °C
Voltage	± 10%
Water inlet pressure	1bar (14psi) / 6bar (84psi)

CONDITIONS	
Standard cube	20g
Ambient temperature	+21°C
Water temperature	+15°C
Electrical consumption (standard voltage)	420 W

IMF 58-80



Automatic ice makers producing hollow cubes — paddle system.

The patented tipping system of the ice collection tray ensures a high level of reliability for this ice-making system.



IMF 58



IMF 80

