

HTS 150

versatile and dynamic

The HTS 150 vacuum filler is versatile and designed for individual use. It suits businesses with a broad product range that require efficient production. The HTS 150's special feed system ensures a continuous filling flow with minimal residue, enhanced by a powerful servo drive. The feed mechanism's strong materials ensure a long service life even under demanding operating conditions. Additional attachments and machines can be connected through a dedicated signal connector.



HTS 150 filler features:

- robust, compact construction
- efficient processing
- minimal product residue
- easy product changes
- high portioning accuracy

Standard equipment:

- + 250-litre folding hopper
- + signal connector for attachments
- + modern touchscreen



Rotor

diameter: 150mm
number of vanes: 14

Technical data

Filling capacity
Filling pressure
Hopper capacity

Portioning rate

30 g

70 g

100 g

Portion weight
Connected load

Net weight

HTS 150

3600 kg / h

35 bar

250 litres

450 portions/min


380 portions/min

320 portions/min

1 - 100.000 g

7,5 kw

460 kg

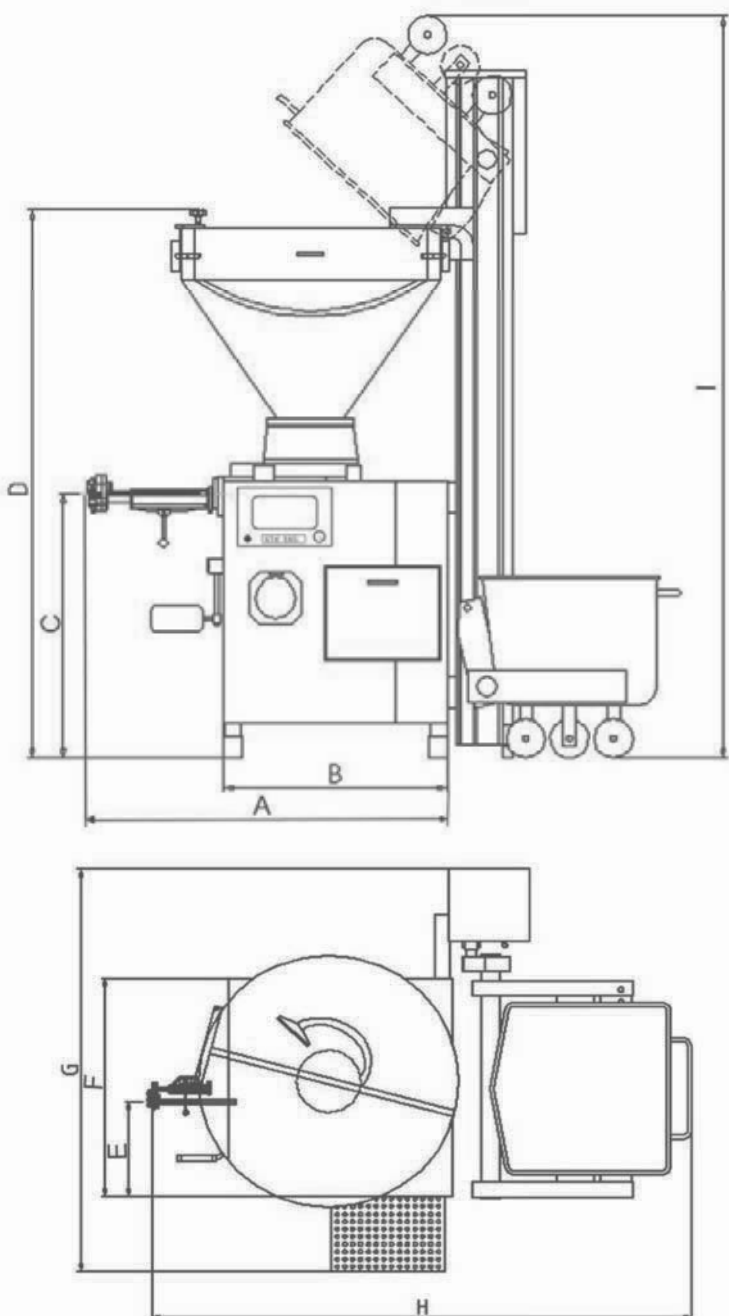

Dimensions [mm]

HTS150

A	1250
B	700
C	1040
D	2040
E	270
F	840
G	1460
H	2210
I	2920



Meat processing machinery

Reparatur und Handel Ges.m.b.H.

Mondseer Strasse 14

AT - 5303 Thalgau

Phone: +43(0)6235/20293

Fax: +43(0)6235/20295

E-mail: office@hts-fueller.at

Web: www.hts-fueller.at