

HTS 250

for businesses with high standards

The HTS 250 meets the economic needs of high-output businesses. Its stainless steel filling mechanism offers exceptional strength and durability. The HTS 250 provides consistently accurate portions and high production output. HTS 250 performance is enhanced by the powerful drive (

HTS power drive) which is

particularly suitable for cold mixtures. The powerful servo system substantially improves output. A distinctive feature of the HTS 250 is the product feed mechanism, which significantly reduces residue in the hopper.

HTS 250 filler features:

- high production output
- quick connection system
- easy product changes
- high portioning accuracy
- additional power available

Standard equipment:

- + 250-litre folding hopper
- + signal connector for attachments
- + modern touchscreen



Rotor

diameter: 180mm
number of vanes: 16

Technical data

Filling capacity
Filling pressure
Hopper capacity

Portioning rate

30 g

70 g

100 g

Portion weight
Connected load


Net weight

HTS 250

5800 kg/h
50 bar
250 litres

500 portions/min
440 portions/min
370 portions/min
1 - 100.000 g

12 kw
630 kg

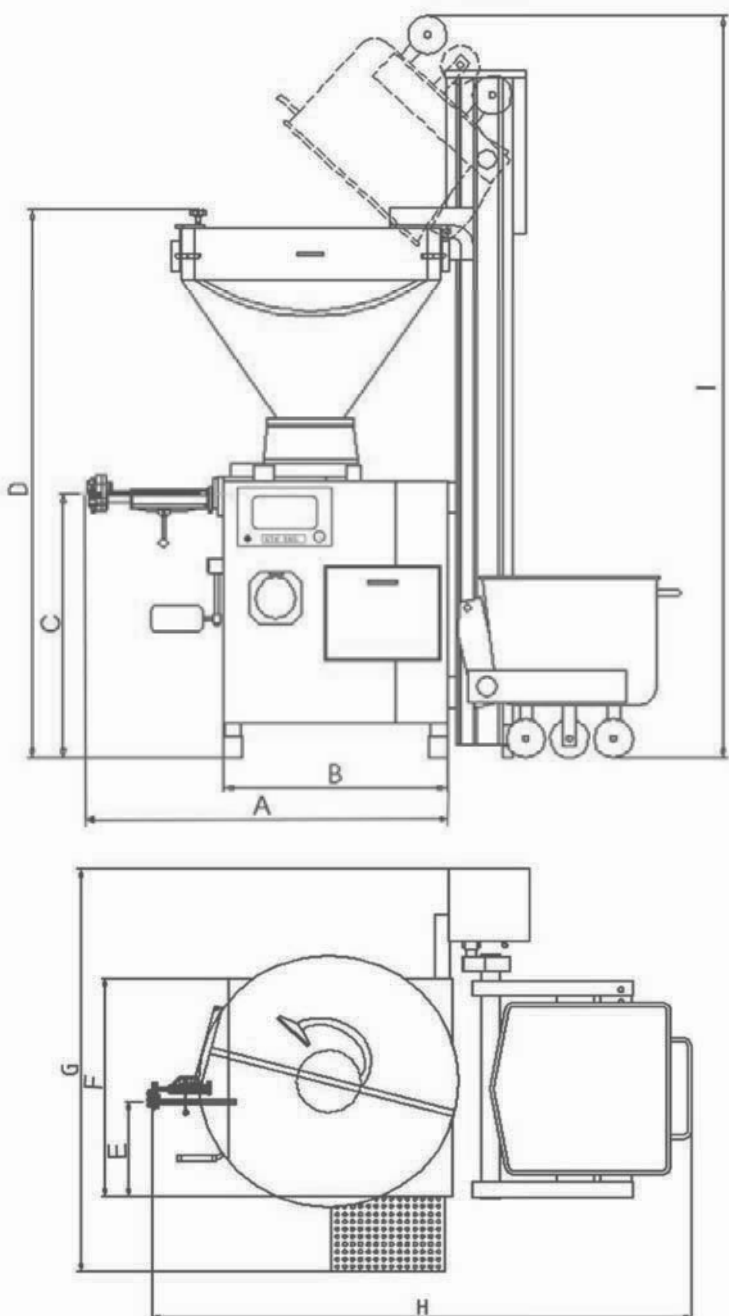

Dimensions [mm]

HTS250

A	1330
B	780
C	1040
D	2000
E	280
F	950
G	1680
H	2290
I	2920



Meat processing machinery

Reparatur und Handel Ges.m.b.H.
Mondseer Strasse 14
AT - 5303 Thalgau

Phone: +43(0)6235/20293

Fax: +43(0)6235/20295

E-mail: office@hts-fueller.at

Web: www.hts-fueller.at