



CB 246-249

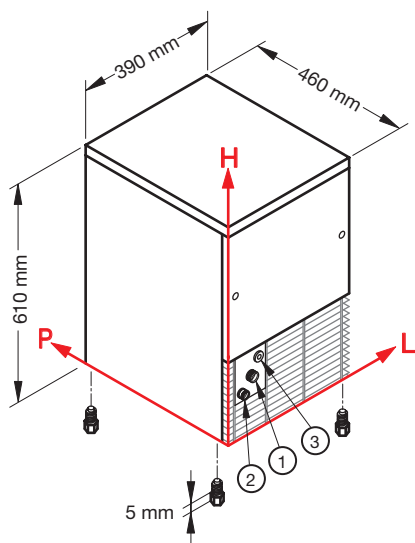

CB 246

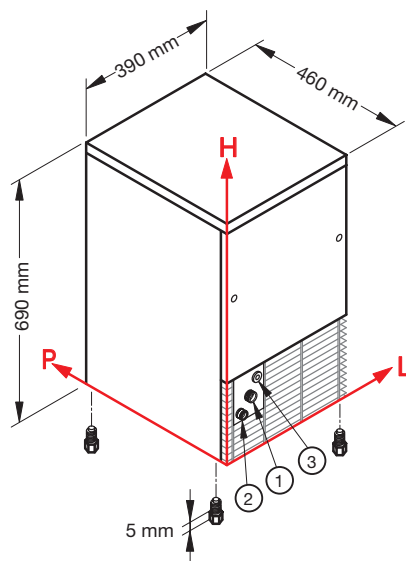

CB 249

PRIKLJUČCI	CB 246			CB 249		
	L	H	Ø	L	H	Ø
① Dovod vode	111	175	3/4"	111	175	3/4"
② Odvod vode	49	130	24 mm	49	130	24 mm
③ Električni priključak	156	211	-	156	211	-

TEHNIČKI PODACI	CB 246	CB 249
Proizvodnja za 24 h, do	24 kg	28 kg
Kapacitet spremnika	6 kg ≈ 350 □	9 kg ≈ 530 □
Sistem hlađenja	A - W	A - W
Vrsta kocke	A-18g D-13g C-33g	A-18g D-13g C-33g
Rashladno sredstvo	R404A	R404A
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Električna potrošnja	350 W	370 W
Osigurač	10 A	10 A
Potrošnja vode (l/kg)	A 5,1 W 14	A 5,1 W 14
Dimenzije (Š×D×V)	390x460x610 mm	390x460x690 mm
Dimenzije sa ambalažom (Š×D×V)	440x520x800 mm	440x520x880 mm
Masa (neto/bruto)	35/41 kg	37/44 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Standardna kocka	18g
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	350 W (standardni napon)

CB 246-249



Automatski ledomati za kocke — sistem raspršivanja.

Kvalitetne kocke: kompaktne, hladne i kristalno bistre. Proizvedeni led pada u spremnik i spreman je da zadovolji potrebe i u periodima najveće potražnje.



CB 246



CB 249

