




CB 640-840-955

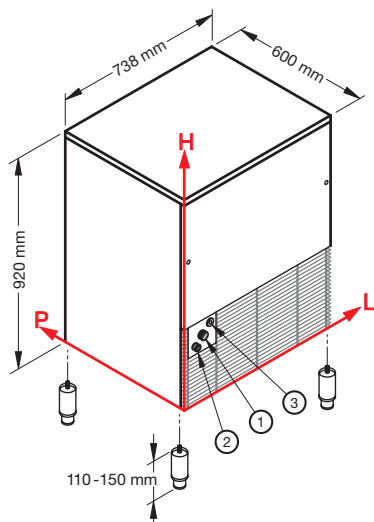

CB 640

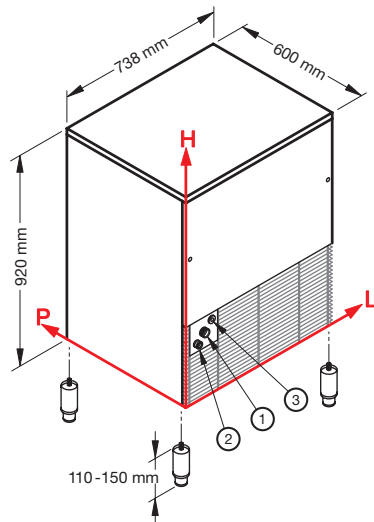

CB 840

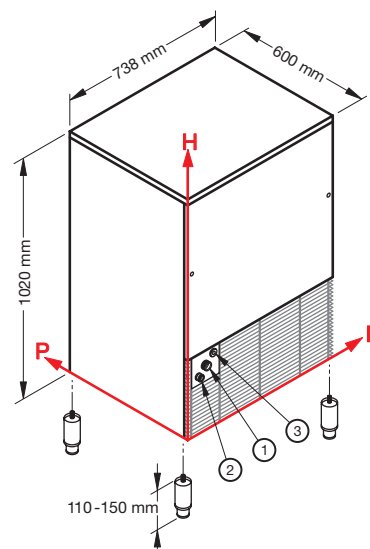

CB 955

PRIKLJUČCI	CB 640			CB 840			CB 955		
	L	H	Ø	L	H	Ø	L	H	Ø
① Dovod vode	116	285	3/4"	116	285	3/4"	116	285	3/4"
② Odvod vode	54	240	24 mm	54	240	24 mm	54	240	24 mm
③ Električni priključak	161	321	-	161	321	-	161	321	-

TEHNIČKI PODACI	CB 640	CB 840	CB 955
Proizvodnja za 24 h, do	65 kg	80 kg	90 kg
Kapacitet spremnika	40 kg ≈ 2350 □	40 kg ≈ 2350 □	55 kg ≈ 3240 □
Sistem hlađenja	A - W	A - W	A - W
Vrsta kocke	A-18g C-33g D-13g E-42g	A-18g C-33g D-13g E-42g	A-18g C-33g D-13g E-42g
Rashladno sredstvo	R404A	R404A	R404A
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Električna potrošnja	650 W	800 W	850 W
Osigurač	10 A	10 A	10 A
Potrošnja vode (l/kg)	A 2,8 W 12,8	A 2,6 W 14,4	A 2,5 W 14,2
Dimenzije (Š×D×V)	738x600x920 mm	738x600x920 mm	738x600x1020 mm
Dimenzije sa ambalažom (Š×D×V)	780x640x1085 mm	780x640x1085 mm	780x640x1185 mm
Masa (neto/bruto)	77/89 kg	86/98 kg	89/102 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Standardna kocka	18g
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	431C (standardni napon)

CB 640-840-955



Automatski ledomat za kocke — sistem raspršivanja.

Kvalitetne kocke: kompaktne, hladne i kristalno bistre. Led pada u spremnik. Posebno pogodno za objekte kojima su potrebne velike količine leda u kratkom periodu.



CB 640



CB 840



CB 955

