




G 250.500.1000

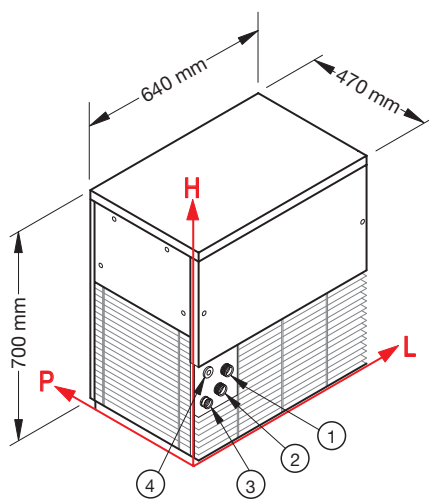

G 250

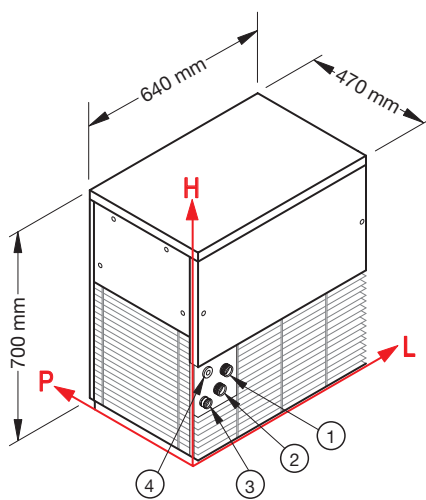

G 500

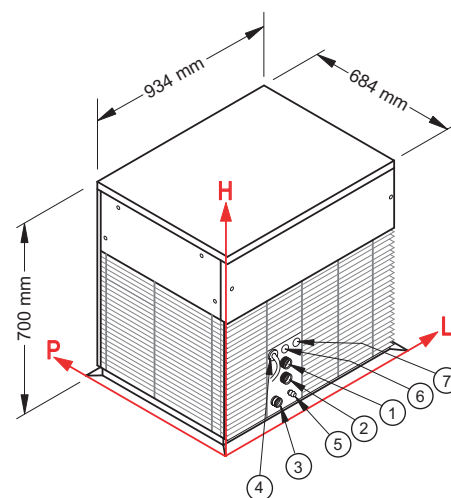

G 1000

PRIKLJUČCI	G 250			G 500			G 1000		
	L	H	Ø	L	H	Ø	L	H	Ø
① Dovod vode za proizvodnju leda	116	282	3/4"	116	282	3/4"	372	187	3/4"
② Dovod vode za kondenzator *	84	238	3/4"	84	238	3/4"	372	120	3/4"
③ Odvod vode	34	228	24 mm	34	228	24 mm	337	60	24 mm
④ Električni priključak	58	292	-	58	292	-	358	257	-
⑤ Odvod vode iz kondenzatora *	-	-	-	-	-	-	382	60	12 mm
⑥ Daljinski priključak	-	-	-	-	-	-	399	257	-
⑦ Priključak na DRB 500	-	-	-	-	-	-	434	257	-

* samo kod vodenog hlađenja

TEHNIČKI PODACI	G 250	G 500	G 1000
Proizvodnja za 24 h, do	250 kg	500 kg	1000 kg
Sistem hlađenja	A - W	A - W	A - W
Rashladno sredstvo	R404A	R404A	R404A
Odgovarajući spremnik	Bin 240 PE - Bin 200 - Bin 350 - Bin 550 V DS RB 100 - DRB 100 - DRB 500	Bin 240 PE - Bin 200 - Bin 350 - Bin 550 V DS RB 100 - DRB 100 - DRB 500	Bin 550 V DS - DRB 500
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz	400-415 V 3N ~ 50 Hz
Električna potrošnja	1050 W	1700 W	3200 W
Osigurač	16 A	16 A	16 A
Potrošnja vode (l/kg)	A 1 W 5,2	A 1 W 5,3	A 1 W 5,3
Dimenzije (ŠxDxV)	640x470x700 mm	640x470x700 mm	934x684x700 mm
Dimenzije sa ambalažom (ŠxDxV)	695x540x940 mm	695x540x940 mm	995x765x890 mm
Masa (neto/bruto)	82/93 kg	104/113 kg	172/195 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	431C (standardni napon)

G 250.500.1000



Automatski ledomati za granulirani led.

Unutrašnja i spoljašnja konstrukcija od nerđajućeg čelika 18/8. Kompaktan granulirani led za restorane, ribarnice, samouslužne objekte i industriju. Modularni modeli bez ugrađenog spremnika leda. Obavezno se kombinuju sa spremnikom Bin (dostupno više modela).



G 250



G 500



G 1000

