



G 500-1000 Split

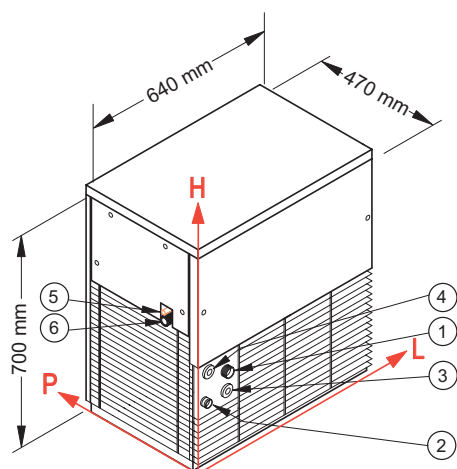

G 500 Split

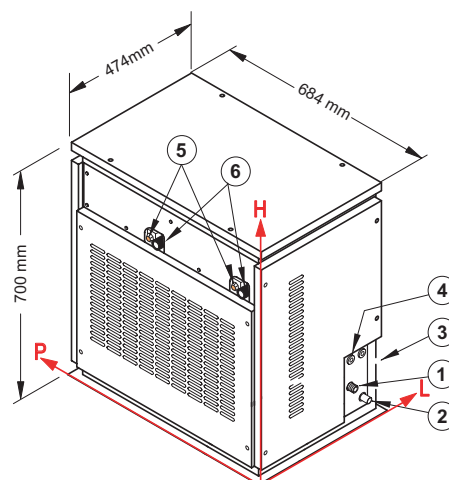

G 1000 Split

PRIKLJUČCI	G 500 Split			G 1000 Split		
	L	H	Ø	L	H	Ø
① Dovod vode za proizvodnju leda	116	282	3/4"	354	115	3/4"
② Odvod vode	34	228	24 mm	399	60	24 mm
③ Daljinski priključak	84	238	-	399	199	-
④ Električni priključak	58	292	-	354	199	-
⑤ Dovodna cev rashladnog sredstva	-	-	-	-	-	-
⑥ Odvodna cev gasovitog rashladnog sredstva	-	-	-	-	-	-

TEHNIČKI PODACI	G 500 Split	G 1000 Split
Proizvodnja za 24 h, do	500 kg	1000 kg
Rashladno sredstvo	R404A - R507	R404A - R507
Odgovarajući spremnik	Bin 240 PE - Bin 200 - Bin 350 - RB 100 - DRB 100 - DRB 500	Na zahtev
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Električna potrošnja	175 W	350 W
Rashladni kapacitet	2300W (temp. ispar. -18°C)	4600W (temp. ispar. -18°C)
Dimenzije (ŠxDxV)	640x470x700 mm	474x684x700 mm
Dimenzije sa ambalažom (ŠxDxV)	695x540x940 mm	540x750x940 mm
Masa (neto/bruto)	64/75 kg	112/122 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	431C (standardni napon)

G 500-1000 Split



G Split: automatski ledomati za granulirani led bez rashladne jedinice.

Automatski ledomati za granulirani led bez rashladne jedinice. Unutrašnja i spoljašnja konstrukcija u potpunosti od nerđajućeg čelika 18/8. Kompaktne granule leda za restorane, ribarnice, samouslužne restorane i razne industrije. Modularni modeli bez ugrađenog spremnika obavezno se kombinuju sa spremnikom Bin (dostupno više modela).



G 500 Split



G 1000 Split

