



GB 1540-1555

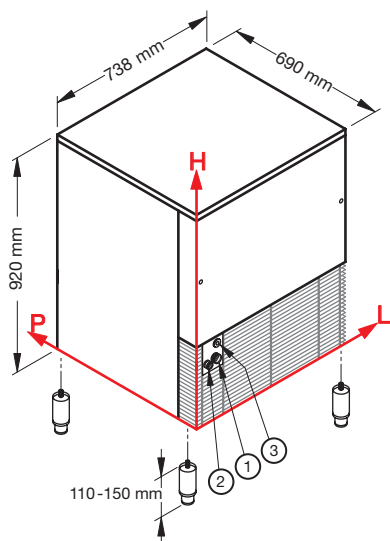

GB 1540

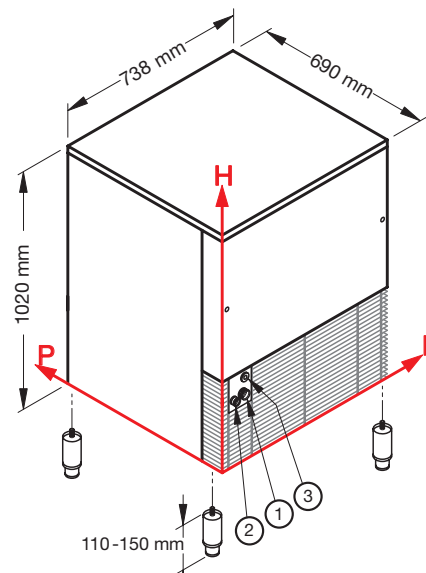

GB 1555

PRIKLJUČCI	GB 1540			GB 1555		
	L	H	Ø	L	H	Ø
① Dovod vode	104	247	3/4"	104	247	3/4"
② Odvod vode	53	240	24 mm	53	240	24 mm
③ Električni priključak	92	319	-	92	319	-

TEHNIČKI PODACI	GB 1540	GB 1555
Proizvodnja za 24 h, do	150 kg	150 kg
Kapacitet spremnika	40 kg	55 kg
Sistem hlađenja	A - W	A - W
Rashladno sredstvo	R404A	R404A
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Električna potrošnja	650 W	650 W
Osigurač	10 A	10 A
Potrošnja vode (l/kg)	A 1 W 6,4	A 1 W 6,4
Dimenzije (Š×D×V)	738x690x920 mm	738x690x1020 mm
Dimenzije sa ambalažom (Š×D×V)	780x735x1085 mm	780x735x1185 mm
Masa (neto/bruto)	85/95 kg	94/105 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	650 W (standardni napon)

GB 1540-1555



Automatski ledomati za granulirani led.

Kompaktan granulirani led za različite primene u barovima, restoranima, ribarnicama, hemijskoj i farmaceutskoj industriji.



GB 1540



GB 1555

