




Modularni ledomat za led u ljuspicama Dnevna proizvodnja do 1560 kg

Hotel Restoran
Brza hrana Bar
Diskoteka
Ribarnica
Supermarket
Medicina i SPA
Industrija

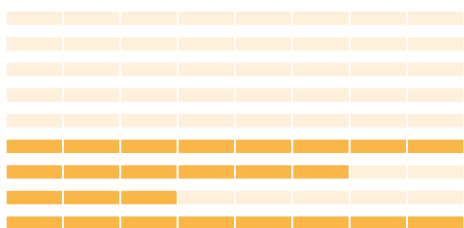

► Pozicija br.




► Karakteristike i prednosti

- Pothlađeni led u ljuspicama, 99% suv
- 1l (vode) - 1kg (leda) - samo vazdušno hlađenje
- Inoks AISI 304, Scotch-Brite obrada
- Tropska klasa +43°C
- Zapreminski odnos 1 m³ = 430 kg leda
- Vertikalni fiksni isparivač bez curenja
- Isparivač od legure Anticorodal
- Odvojivi filter vazduha koji se čisti
- Filter protiv kamenca koji se čisti
- Vazdušno ili vodeno hlađenje
- ABS plastični delovi sa FDA odobrenjem
- Zaobljene unutrašnje površine, lake za čišćenje
- Bez supstanci ograničenih direktivom RoHS
- Elektromehaničko upravljanje
- Automatsko punjenje vodom
- Standardni i posebni naponi
- Konstrukcija od inoksa



Vertikalni fiksni isparivač bez curenja



Odvojivi filter vazduha koji se čisti



Filter protiv kamenca koji se čisti



Konstrukcija od inoksa

► Odgovarajući spremnici

- Bin 550V DS
- Double Roller Bin 500

► Proizv. 24h

	Temp. vazduha		Temp. vode		Kg	Lbs
	10° C	50° F	7° C	45° F	1560	3439
	21° C	70° F	15° C	60° F	1500	3307

2 godine garancije
uz određena ograničenja

► Sertifikati dostupni za ovaj model






Led u ljuspicama

Muster 1500



Modularni ledomat za led u ljuspicama
Dnevna proizvodnja do 1560 kg

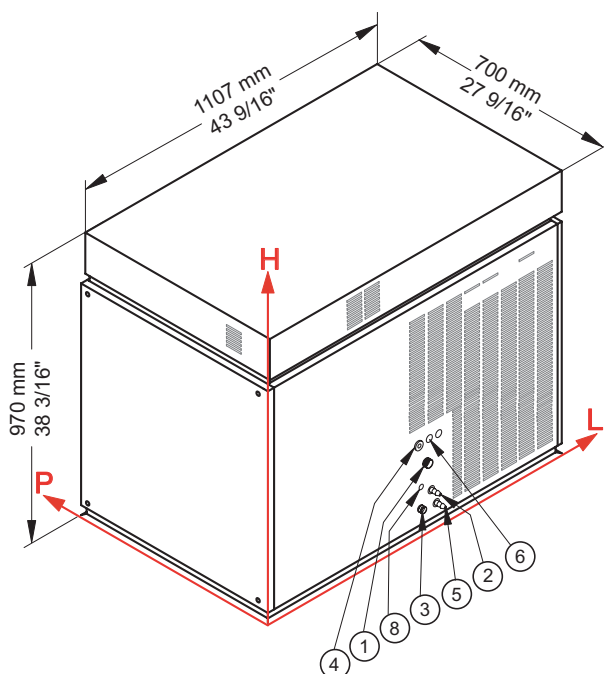

► Radni uslovi

- Mesto ugradnje: u zidu ili na zidu

	Min	Max
Temperatura okoline	+10° C / +50° F	+43° C / 110° F
Temperatura vode	+3° C / +37° F	+32° C / +90° F
Napon	-10%	+10%
Pritisak dovodne vode	1bar (14 psi)	6bar (84 psi)

► Učinak

	Temperatura vazduha	Temperatura vode					
		7° C	45° F	15° C	60° F	21° C	70° F
Temperatura vode	10° C	1560 kg					
	50° F		3439 lbs				
	21° C			1500 kg			
	70° F				3307 lbs		
	32° C					1200 kg	
	90° F						2646 lbs

► Priklucci

Sve mere su od donjeg levog ugla (Š-V-Ø)

- ① **Dovod vode:** 63 mm / 22 3/16" - 192 mm / 7 9/16" - 3/4"
- ② **Dovod vode kond:** 63 mm / 22 3/16" - 125 mm / 4 15/16" - 12 mm / 8/16"
- ③ **Odvod vode:** 62 mm / 20 13/16" - 65 mm / 2 9/16" - 24 mm / 15/16"
- ④ **Električni priključci:** 532 mm / 20 15/16" - 262 mm / 10 5/16"
- ⑤ **Odvod vode kond:** 573 mm / 22 9/16" - 65 mm / 2 6/16" - 12 mm / 8/16"
- ⑥ **Daljinski priključci:** 574 mm / 22 10/16" - 262 mm / 10 5/16"
- ⑧ **Priključak napojne pumpe:** 515 mm / 20 5/16" - 159 mm / 10 5/16"
- ② ③ Samo za sisteme sa vodenim hlađenjem

► Tehnički podaci

Proizvodnja za 24h	1500 kg / 3307 lbs
Sistem hlađenja	A - W
Rashladno sredstvo	R452A
Standardni napon	400-415 V ~ 3N 50 Hz
Električna potrošnja	6000 W
Osigurač	32 A
Potrošnja vode	A: 1 l/kg - 12,0 gal/100 lbs W: 7 l/kg - 83,9 gal/100 lbs

Dimenzije (Š-D-V mm)	1107 - 700 - 970
(Š-D-V in)	43 9/16 - 27 9/16 - 38 3/16
Sa ambalažom (Š-D-V mm)	1210 - 800 - 1185
(Š-D-V in)	47 10/16 - 31 8/16 - 46 10/16
Neto masa	306 kg / 675 lbs
Bruto masa	342 kg / 754 lbs
Završna obrada	Nerđajući čelik AISI 304, Scotch-Brite

Svi tehnički podaci važe pri sledećim uslovima:
Temperatura okoline +21° C
Temperatura vode +15° C
Električna potrošnja pri +21° C (standardni napon)

Modeli i specifikacije mogu se promeniti bez prethodne najave

Rev. 00 - izdanje mart 2021



www.bremaice.it
info@bremaicegroup.it

Mi smo Brema

