




M 600 Split

Ice flakes



Modular flake ice maker
Daily production up to 620 kg

Hotel
Restaurant
Fast food Bar
Disco Fish
market
Supermarket
Medical & SPA
Industry

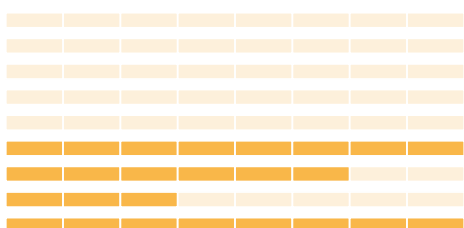

► Position No.

► Features & benefits

- Subcooled flake ice, 99% dry
- 1l (water) - 1kg (ice) - air-cooled models only
- AISI 304 stainless steel, Scotch-Brite finish
- Tropical class +43°C
- Specific volume 1 m³ = 430 kg of ice
- Vertical fixed "no leak" evaporator
- Anticorodal alloy evaporator
- Cleanable anti-scale filter
- FDA-approved ABS plastic components
- Easy-to-clean rounded internal surfaces
- Free from RoHS-restricted substances
- Automatic water filling
- Standard and special voltages



AISI 304 stainless steel,
Scotch-Brite finish



Vertical fixed "no
leak" evaporator



Cleanable
anti-scale filter

► Compatible bins

- Bin 350
- Bin 550V DS
- Double Roller Bin 100
- Double Roller Bin 500
- Double Roller Bin 1200

2-year warranty
subject to limitations

► Certifications available for this model



www.bremagroup.it
info@bremaicegroup.it

We are Brema






Ice flakes

M 600 Split



Modular flake ice maker
Daily production up to 620 kg

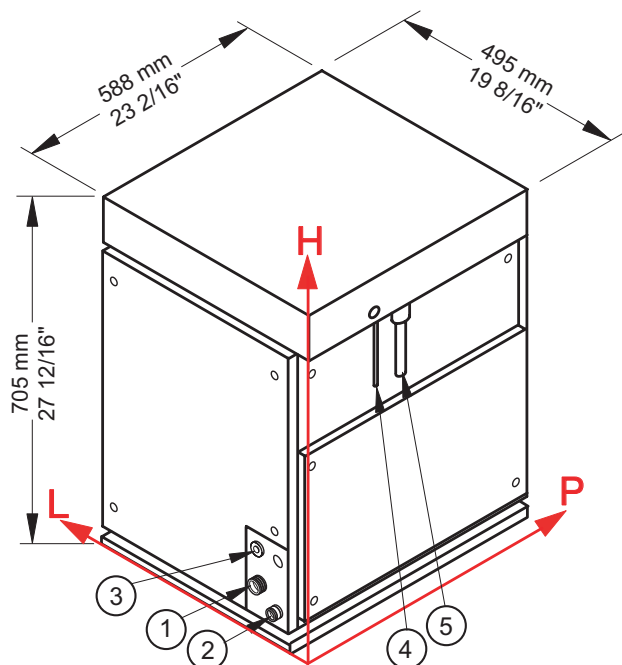

► Operating conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Connections

- ① Water inlet
- ② Water outlet
- ③ Electrical connection
- ④ Refrigerant supply pipe
- ⑤ Gaseous refrigerant outlet pipe

► Technical information

Production in 24h	620 kg / 1367 lbs
Compatible refrigerant	R404A - R507 - R448A - R449A - R407F - R452A
Refrigerating capacity	3500 W (evap. temp. -22° C)
Water consumption	1 l/kg - 12,0 gal/100 lbs
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	180 W
Finish	AISI 304 stainless steel, Scotch-Brite

Dimensions (W-D-H mm)	495 - 588 - 705
(W-D-H in)	19 8/16 - 23 2/16 - 27 12/16
Packed dimensions (W-D-H mm)	550 - 655 - 900
(W-D-H in)	21 10/16 - 25 13/16 - 35 7/16
Net weight	73 kg / 161 lbs
Gross weight	89 kg / 196 lbs

All technical data refer to the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - issued January 2025



www.bremagroup.it
info@bremaicegroup.it

We are Brema

