



CB 1265-1565

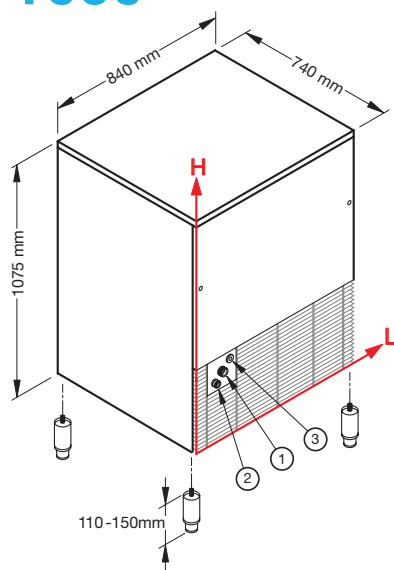

CB 1265

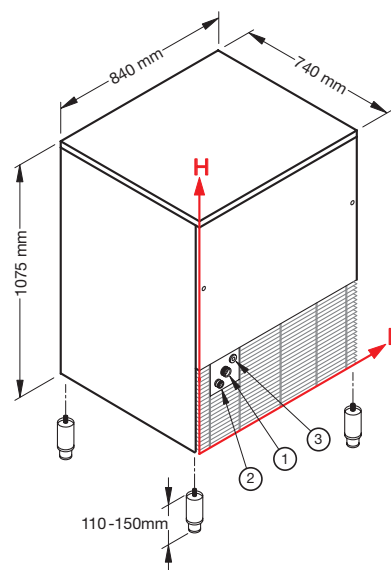

CB 1565

PRIKLJUČCI	CB 1265			CB 1565		
	L	H	Ø	L	H	Ø
① Dovod vode	141	290	3/4"	141	290	3/4"
② Odvod vode	79	245	24 mm	79	245	24 mm
③ Električni priključak	186	326	-	186	326	-

TEHNIČKI PODACI	CB 1265	CB 1565
Proizvodnja za 24 h, do	130 kg	155 kg
Kapacitet spremnika	65 kg ≈ 3830 ▢	65 kg ≈ 3830 ▢
Sistem hlađenja	A - W	A - W
Vrsta kocke	A-18g C-33g D-13g E-42g	A-18g C-33g D-13g E-42g
Rashladno sredstvo	R404A	R404A
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Električna potrošnja	1050 W	1400 W
Osigurač	16 A	16 A
Potrošnja vode (l/kg)	A 2,8 W 15,3	A 2,6 W 13
Dimenzije (Š×D×V)	840x740x1075 mm	840x740x1075 mm
Dimenzije sa ambalažom (Š×D×V)	880x785x1245 mm	880x785x1245 mm
Masa (neto/bruto)	113/133 kg	118/138 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Standardna kocka	18g
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	1400 W (standardni napon)

CB 1265-1565



Automatski ledomat za kocke — sistem raspršivanja.

Kvalitetne kocke: kompaktne, hladne i kristalno bistre. Led pada u spremnik. Posebno pogodno za objekte kojima su potrebne velike količine leda u kratkom periodu.



CB 1265



CB 1565

