



CB 134-184

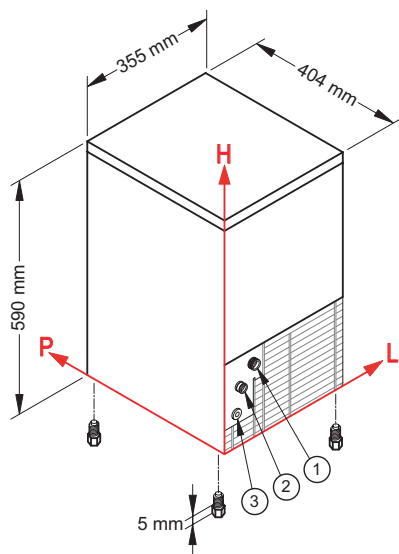

CB 134

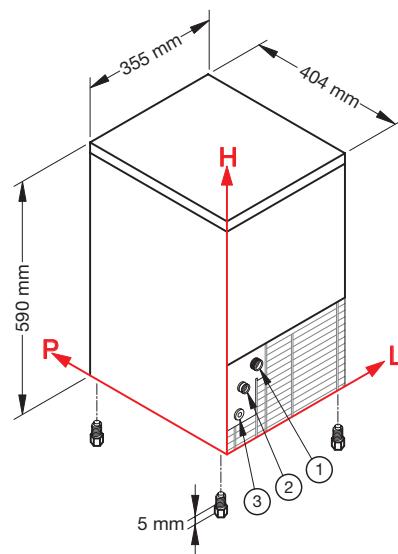

CB 184

PRIKLJUČCI	CB 134			CB 184		
	L	H	Ø	L	H	Ø
① Dovod vode	88	184	3/4"	88	184	3/4"
② Odvod vode	45	138	24 mm	45	138	24 mm
③ Električni priključak	41	73	-	41	73	-

TEHNIČKI PODACI	CB 134	CB 184
Proizvodnja za 24 h, do	13 kg	21 kg
Kapacitet spremnika	4 kg ≈ 310 □	4 kg ≈ 310 □
Sistem hlađenja	A	A - W
Vrsta kocke	D-13g	D-13g
Rashladno sredstvo	R134A	R404A
Standardni napon	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Električna potrošnja	200 W	320 W
Osigurač	10 A	10 A
Potrošnja vode (l/kg)	A 5	A 4,5 W 20
Dimenzije (Š×D×V)	355x404x590 mm	355x404x590 mm
Dimenzije sa ambalažom (Š×D×V)	415x445x780 mm	415x445x780 mm
Masa (neto/bruto)	24,5/31 kg	27,5/34 kg
Završna obrada	sivi ABS	sivi ili plavi ABS nerđajući čelik 18/8, Scotch-Brite

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Standardna kocka	13g
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	200 W (standardni napon)

CB 134-184



Automatski ledomati za kocke — sistem raspršivanja.

Kvalitetne kocke: kompaktne, hladne i kristalno bistre. Male dimenzije i prijatan izgled omogućavaju uklapanje u svaki enterijer.



CB 134



CB 184

