




Modularni ledomat za led u ljuspicama Dnevna proizvodnja do 620 kg

Hotel Restoran
Brza hrana Bar
Diskoteka
Ribarnica
Supermarket
Medicina i SPA
Industrija

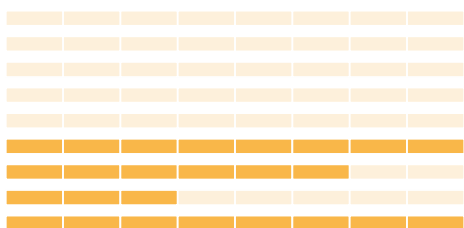

► Pozicija br.



► Karakteristike i prednosti

- Pothlađeni led u ljuspicama, 99% suv
- 1l (vode) - 1kg (leda) - samo vazdušno hlađenje
- Inoks AISI 304, Scotch-Brite obrada
- Tropska klasa +43°C
- Zapreminski odnos 1 m³ = 430 kg leda
- Vertikalni fiksni isparivač bez curenja
- Isparivač od legure Anticorodal
- Filter protiv kamenca koji se čisti
- ABS plastični delovi sa FDA odobrenjem
- Zaobljene unutrašnje površine, lake za čišćenje
- Bez supstanci ograničenih direktivom RoHS
- Automatsko punjenje vodom
- Standardni i posebni naponi



Inoks AISI 304,
Scotch-Brite obrada



Vertikalni fiksni
isparivač bez curenja



Filter protiv
kamenca koji se čisti

► Odgovarajući spremnici

- Bin 350
- Bin 550V DS
- Double Roller Bin 100
- Double Roller Bin 500
- Double Roller Bin 1200

2 godine garancije
uz određena ograničenja

► Sertifikati dostupni za ovaj model






Led u ljuspicama

M 600 Split



Modularni ledomat za led u ljuspicama
Dnevna proizvodnja do 620 kg

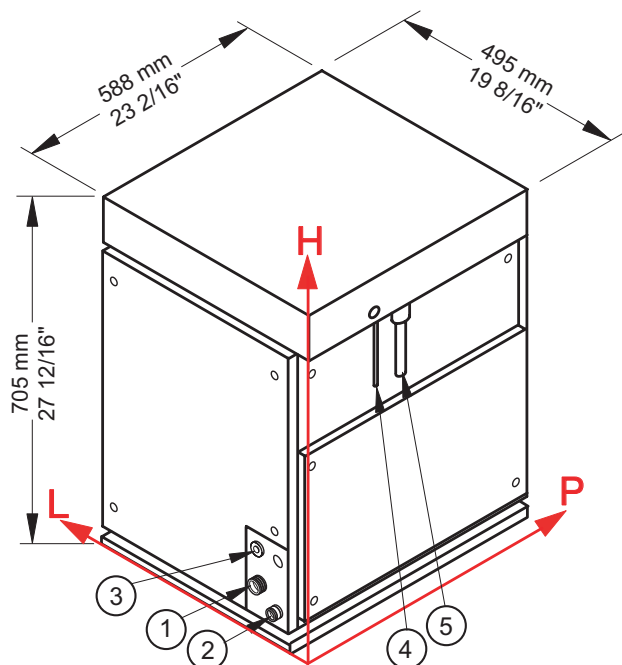

► Radni uslovi

- Mesto ugradnje

	Min	Max
Temperatura okoline	+10° C / +50° F	+43° C / 110° F
Temperatura vode	+3° C / +37° F	+32° C / +90° F
Napon	-10%	+10%
Pritisak dovodne vode	1bar (14 psi)	6bar (84 psi)

► Priključci

- ① Dovod vode
- ② Odvod vode
- ③ Električni priključak
- ④ Dovodna cev rashladnog sredstva
- ⑤ Odvodna cev gasovitog rashladnog sredstva

► Tehnički podaci

Proizvodnja za 24h	620 kg / 1367 lbs
Odgovarajuće rashladno sredstvo	R404A - R507 - R448A - R449A - R407F - R452A
Rashladni kapacitet	3500 W (temp. ispar. -22° C)
Potrošnja vode	1 l/kg - 12,0 gal/100 lbs
Standardni napon	220-240 V ~ 50 Hz
Prosečna potrošnja energije	180 W
Završna obrada	Nerđajući čelik AISI 304, Scotch-Brite

Dimenzije (Š-D-V mm)	495 - 588 - 705
(Š-D-V in)	19 8/16 - 23 2/16 - 27 12/16
Sa ambalažom (Š-D-V mm)	550 - 655 - 900
(Š-D-V in)	21 10/16 - 25 13/16 - 35 7/16
Neto masa	73 kg / 161 lbs
Bruto masa	89 kg / 196 lbs

Svi tehnički podaci važe pri sledećim uslovima:
Temperatura okoline +21° C
Temperatura vode +15° C
Prosečna potrošnja energije pri +43° C (standardni napon)

Modeli i specifikacije mogu se promeniti bez prethodne najave

Rev. 03 - izdanje januar 2025



www.bremagroup.it
info@bremagroup.it

Mi smo Brema

