




Muster 350-600-800

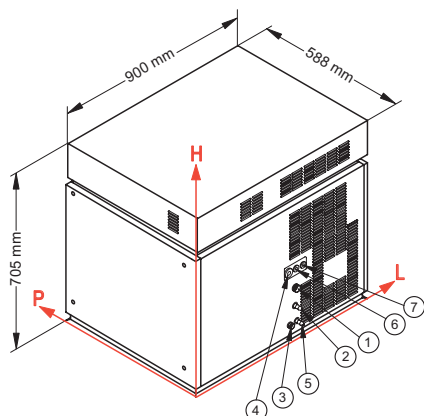

Muster 350

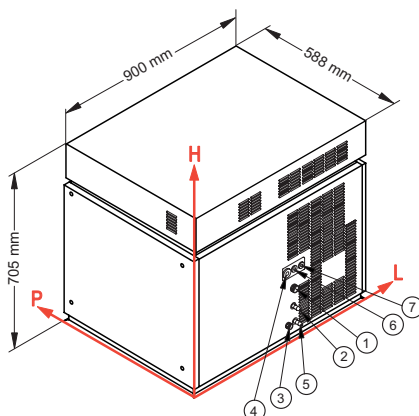

Muster 600

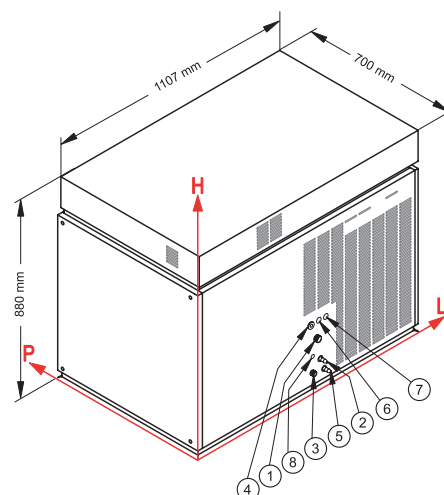

Muster 800

PRIKLJUČCI	Muster 350			Muster 600			Muster 800		
	L	H	Ø	L	H	Ø	L	H	Ø
① Dovod vode za proizvodnju leda	463	187	3/4"	463	187	3/4"	563	192	3/4"
② Dovod vode za kondenzator *	463	120	12 mm	463	120	12 mm	563	125	12 mm
③ Odvod vode	428	60	24 mm	428	60	24 mm	528	65	24 mm
④ Električni priključak	434	257	-	434	257	-	532	262	-
⑤ Odvod vode iz kondenzatora *	472	60	12 mm	472	60	12 mm	573	65	12 mm
⑥ Daljinski priključak	473	257	-	473	257	-	574	262	-
⑦ Priključak na DRB 500	510	257	-	510	257	-	608	262	-
⑧ Priključak dozirne pumpe	-	-	-	-	-	-	515	159	-

* samo kod vodenog hlađenja

TEHNIČKI PODACI	Muster 350	Muster 600	Muster 800
Proizvodnja za 24 h, do	400 kg	620 kg	900 kg
Sistem hlađenja	A - W **	A	A - W **
Rashladno sredstvo	R404A	R404A	R404A
Odgovarajući spremnik	Bin 200 - Bin 350 - DRB 100	Bin 350 - DRB 100	Bin 350 - Bin 550 V DS - DRB 100 - DRB 500
Standardni napon	220-240 V ~ 50 Hz	400-415V 3N ~ 50Hz	400-415V 3N ~ 50Hz
Električna potrošnja	2100 W	3000 W	4600 W
Osigurač	16 A	16 A	16 A
Potrošnja vode (l/kg)	A 1 W 7,5	A 1	A 1 W 6,9
Dimenzije (ŠxDxV)	900x588x705 mm	900x588x705 mm	1107x700x880 mm
Dimenzije sa ambalažom (ŠxDxV)	965x655x880 mm	965x655x880 mm	1210x800x1095 mm
Masa (neto/bruto)	137/152 kg	151/166 kg	241/262 kg

Završna obrada: nerđajući čelik 18/8, Scotch-Brite

** kombinovano hlađenje dostupno na zahtev

USLOVI UGRADNJE	Min / Max
Ugradnja	u zatvorenom
Temperatura okoline	+10 / +43 °C
Temperatura vode	+3 / +32 °C
Napon	± 10%
Pritisak dovodne vode	1bar (14psi) / 6bar (84psi)

USLOVI	
Temperatura okoline	+21°C
Temperatura vode	+15°C
Električna potrošnja	431C (standardni napon)

Muster 350-600-800



Automatski ledomati za pothlađene ravne ljuspice, namenjeni pekarskoj, ribarskoj, mesnoj, mlekarskoj, sirarskoj i hemijskoj industriji.

Ravne ljuspice idealne debljine za različite primene u navedenim industrijama. Velika rashladna moć (temperatura od -5°C do -10°C). Mogu se kombinovati sa spremnicima leda.



Muster 350



Muster 600



Muster 800

